

Tonic

THORN

96638015 TONIC S 2800-940 3GU SP BK




Tonic

LED spotlight for 3 phase track installations with spot light distribution and stabilized color temperature. Electronic, fixed output control gear. Class II electrical, IP20. Body: Die-cast aluminium black micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 360° and pivotable through 90°. Complete with 4000K LED


Dimensions: Ø68 x 140 mm
Luminaire input power: 24.5 W
Luminaire luminous flux: 2943 lm
Luminaire efficacy: 120 lm/W
Weight: 0.52 kg



TLG_TNC2_F_S_BK.jpg

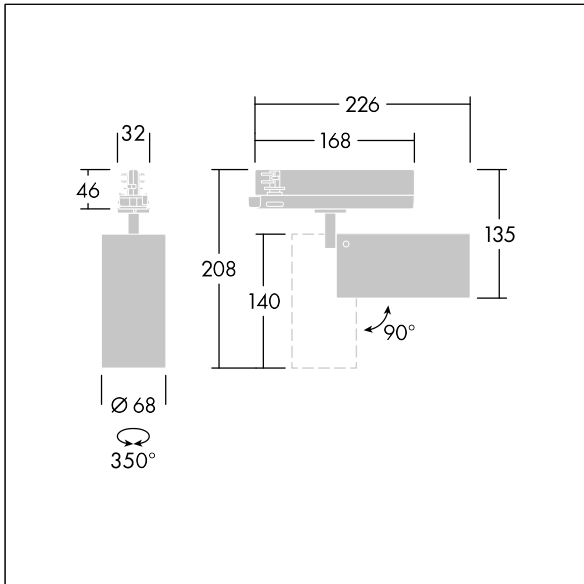

TLG TNC2 M S.wmf

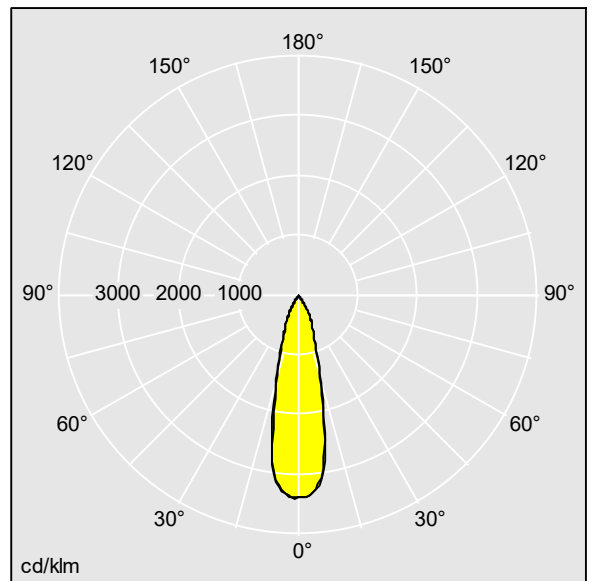

96638015 TONIC S 2800 940 3GU SP BK.Idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 2943 lm
Luminaire efficacy*: 120 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 4000 Kelvin
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Chromaticity tolerance (initial MacAdam): 3
 Rated median useful life*:
 L80 50000 h at 25 °C
 Ballast: 1x HF_
 Luminaire input power*: 24.5 W Power factor = 0.9
 Dimming: Fixed output
 Maintenance category CIE 97: D - Enclosed IP2X