

96638001 TONIC XS 1700-930 3GU WFL BK

LED 14W TON_1700_3K_WFL	CB	UK CA	BEG	05	IP20		CE												
-------------------------	----	----------	-----	----	------	--	----	--	--	--	--	--	--	--	--	--	--	--	--


Tonic

LED spotlight for 3 phase track installations with wide flood light distribution and stabilized color temperature. Electronic, fixed output control gear. Class II electrical, IP20. Body: Die-cast aluminium black micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 360° and pivotable through 90°. Complete with 3000K LED


Dimensions: Ø55 x 125 mm
 Luminaire input power: 14.4 W
 Luminaire luminous flux: 1509 lm
 Luminaire efficacy: 105 lm/W
 Weight: 0.4 kg



TLG_TNC2_F_XS_BK.jpg

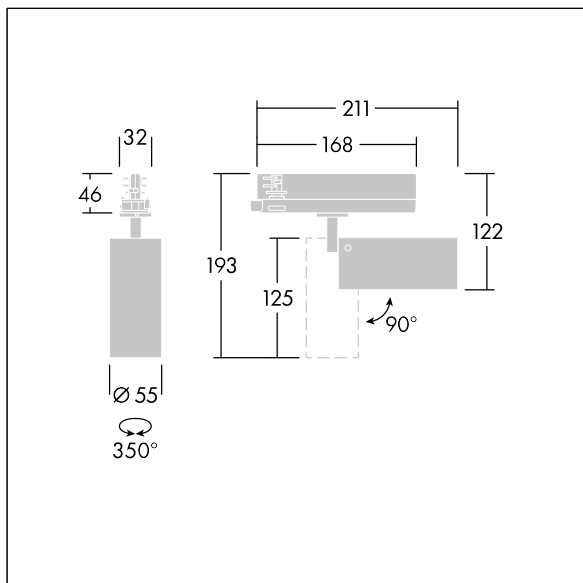

TLG_TNC2_M_XS.wmf

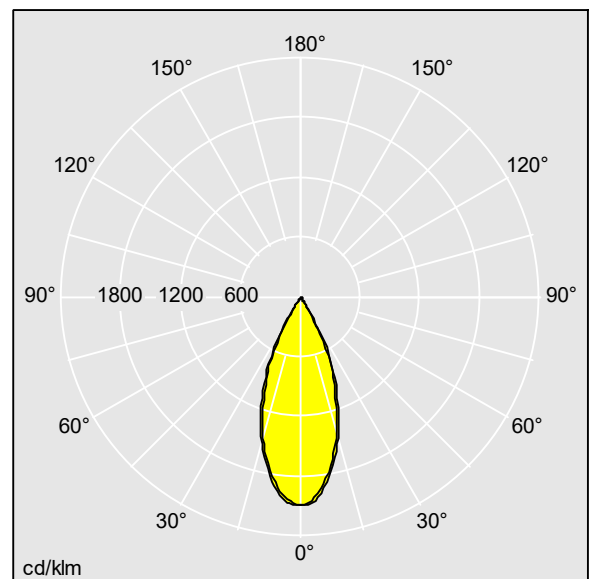

96638001_TONIC_XS_1700_930_3GU_WFL_BK.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 1509 lm
 Luminaire efficacy*: 105 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Chromaticity tolerance (initial MacAdam): 3
 Rated median useful life*:
 L80 50000 h at 25 °C
 Ballast: 1x HF_
 Luminaire input power*: 14.4 W Power factor = 0.9
 Dimming: Fixed output
 Maintenance category CIE 97: D - Enclosed IP2X

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting