


96638012 TONIC S 2800-930 3GU FL WH



Tonic

LED spotlight for 3 phase track installations with flood light distribution and stabilized color temperature. Electronic, fixed output control gear. Class II electrical, IP20. Body: Die-cast aluminium white micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 360° and pivotable through 90°. Complete with 3000K LED

Dimensions: Ø68 x 140 mm
 Luminaire input power: 24.5 W
 Luminaire luminous flux: 2820 lm
 Luminaire efficacy: 115 lm/W
 Weight: 0.52 kg

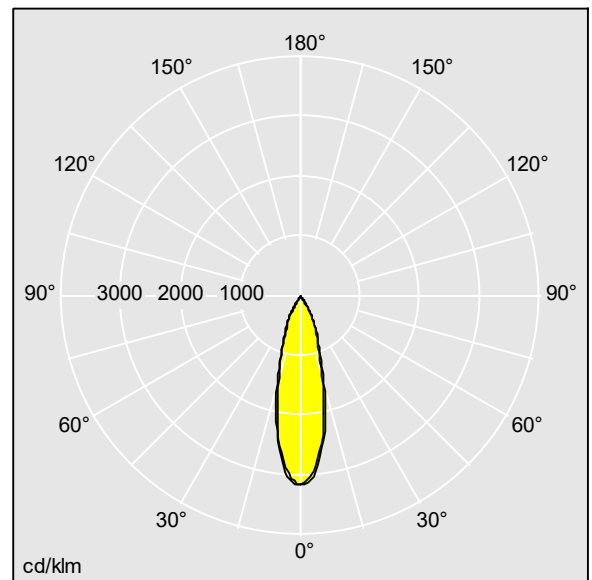

96638012_TONIC_S_2800_930_3GU_FL_WH.Idt

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 2820 lm
 Luminaire efficacy*: 115 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Chromaticity tolerance (initial MacAdam): 3
 Rated median useful life*:
 L80 50000 h at 25 °C
 Ballast: 1x HF_
 Luminaire input power*: 24.5 W Power factor = 0.9
 Dimming: Fixed output
 Maintenance category CIE 97: D - Enclosed IP2X