

96638026 TONIC M 3600-930 3GU WFL WH

LED 31W TON_3600_3K_WFL IP20


Tonic

LED spotlight for 3 phase track installations with wide flood light distribution and stabilized color temperature. Electronic, fixed output control gear. Class II electrical, IP20. Body: Die-cast aluminium white micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 360° and pivotable through 90°. Complete with 3000K LED


Dimensions: Ø85 x 150 mm
Luminaire input power: 31.1 W
Luminaire luminous flux: 3658 lm
Luminaire efficacy: 118 lm/W
Weight: 0.81 kg



TLG_TNC2_F_M_WH.jpg

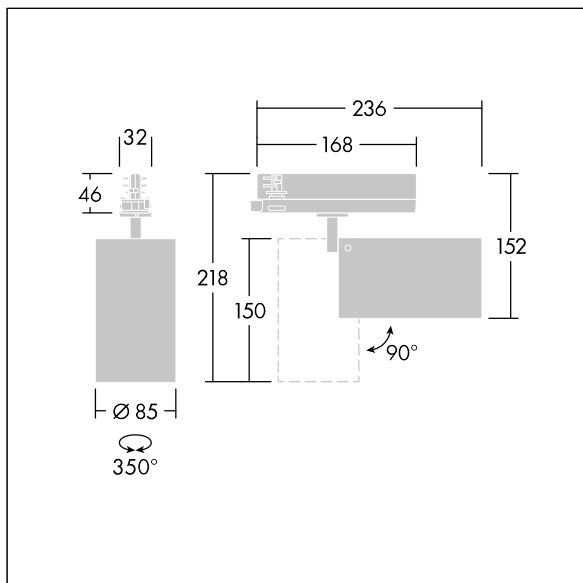

TLG TNC2 M M.wmf

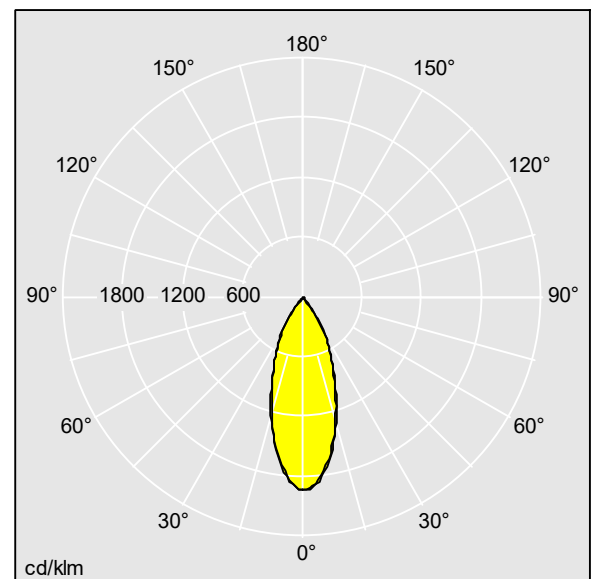

96638026 TONIC M 3600 930 3GU WFL WH.Idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 3658 lm
Luminaire efficacy*: 118 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin
LOR: 1.00 ULOR: 0.00 DLOR: 1.00

Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L80 50000 h at 25 °C
Ballast: 1x HF
Luminaire input power*: 31.1 W Power factor = 0.9
Dimming: Fixed output
Maintenance category CIE 97: D - Enclosed IP2X