

96638030 TONIC M 3600-940 3GU FL WH

LED 31W TON_3600_4K_FL	CB	UK CA	BEG	05	IP 20		CE							
------------------------	----	----------	-----	----	-------	--	----	--	--	--	--	--	--	--


Tonic

LED spotlight for 3 phase track installations with flood light distribution and stabilized color temperature. Electronic, fixed output control gear. Class II electrical, IP20. Body: Die-cast aluminium white micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 360° and pivotable through 90°. Complete with 4000K LED


Dimensions: Ø85 x 150 mm
 Luminaire input power: 31.1 W
 Luminaire luminous flux: 3853 lm
 Luminaire efficacy: 124 lm/W
 Weight: 0.81 kg



TLG_TNC2_F_M_WH.jpg

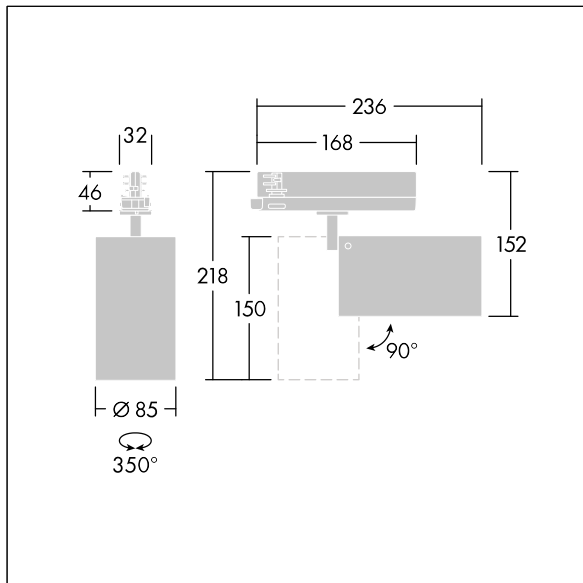

TLG_TNC2_M_M.wmf

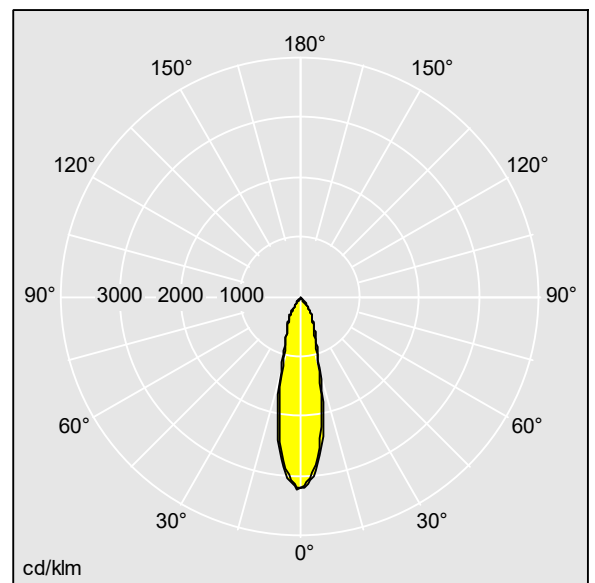

96638030_TONIC_M_3600_940_3GU_FL_WH.idt

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 3853 lm
 Luminaire efficacy*: 124 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 4000 Kelvin
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Chromaticity tolerance (initial MacAdam): 3
 Rated median useful life*:
 L80 50000 h at 25 °C
 Ballast: 1x HF_
 Luminaire input power*: 31.1 W Power factor = 0.9
 Dimming: Fixed output
 Maintenance category CIE 97: D - Enclosed IP2X