

Tonic

THORN

96638027 TONIC M 3600-940 3GU SP BK




Tonic

LED spotlight for 3 phase track installations with spot light distribution and stabilized color temperature. Electronic, fixed output control gear. Class II electrical, IP20. Body: Die-cast aluminium black micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 360° and pivotable through 90°. Complete with 4000K LED


Dimensions: Ø85 x 150 mm
Luminaire input power: 31.2 W
Luminaire luminous flux: 3862 lm
Luminaire efficacy: 124 lm/W
Weight: 0.81 kg



TLG_TNC2_F_M_BK.jpg

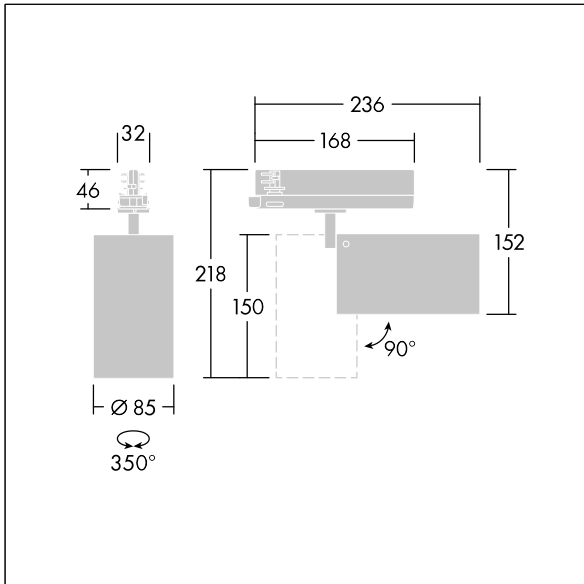

TLG_TNC2_M_M.wmf

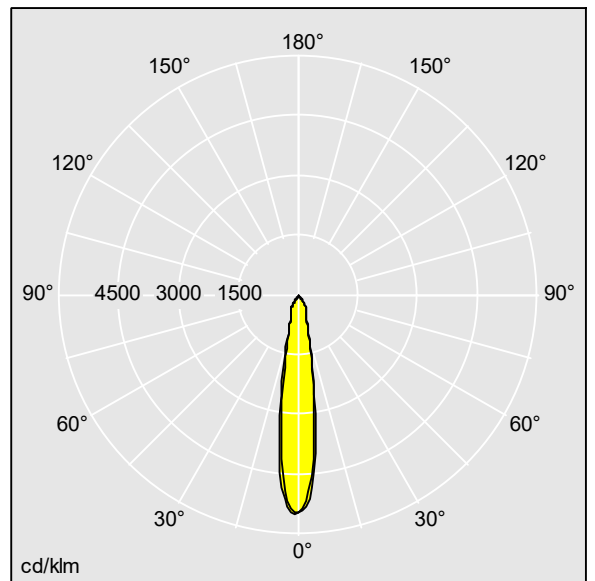

96638027 TONIC M 3600 940 3GU SP BK.Idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 3862 lm
Luminaire efficacy*: 124 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 4000 Kelvin
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L80 50000 h at 25 °C
Ballast: 1x HF_
Luminaire input power*: 31.2 W Power factor = 0.9
Dimming: Fixed output
Maintenance category CIE 97: D - Enclosed IP2X