

96638031 TONIC M 3600-940 3GU WFL BK

LED 31W TON_3600_4K_WFL	CB	UK CA	BEG	05	IP20		CE												
-------------------------	----	----------	-----	----	------	--	----	--	--	--	--	--	--	--	--	--	--	--	--


Tonic

LED spotlight for 3 phase track installations with wide flood light distribution and stabilized color temperature. Electronic, fixed output control gear. Class II electrical, IP20. Body: Die-cast aluminium black micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 360° and pivotable through 90°. Complete with 4000K LED


Dimensions: Ø85 x 150 mm
 Luminaire input power: 31 W
 Luminaire luminous flux: 3856 lm
 Luminaire efficacy: 124 lm/W
 Weight: 0.81 kg



TLG_TNC2_F_M_BK.jpg

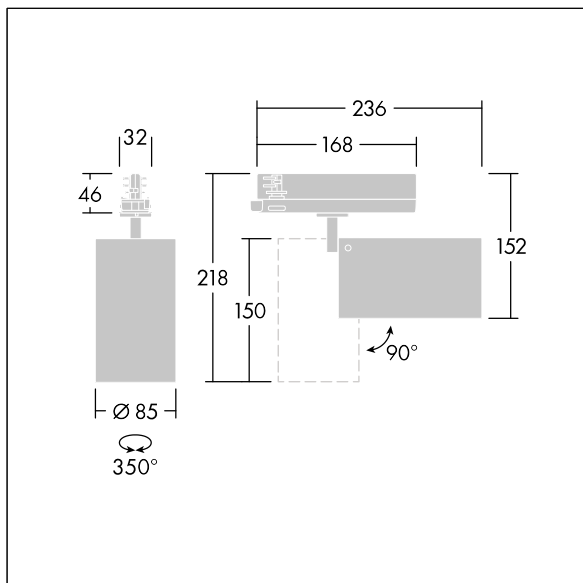

TLG_TNC2_M_M.wmf

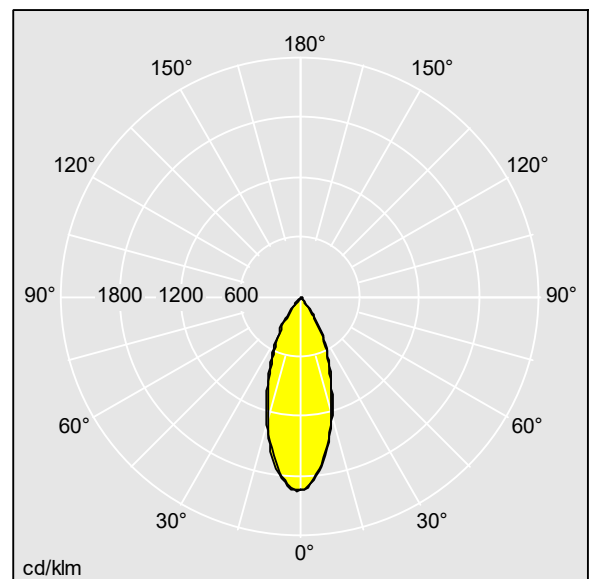

96638031_TONIC_M_3600_940_3GU_WFL_BK.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 3856 lm
 Luminaire efficacy*: 124 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 4000 Kelvin
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Chromaticity tolerance (initial MacAdam): 3
 Rated median useful life*:
 L80 50000 h at 25 °C
 Ballast: 1x HF_
 Luminaire input power*: 31 W Power factor = 0.9
 Dimming: Fixed output
 Maintenance category CIE 97: D - Enclosed IP2X

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting