


LED spotlight

LED spotlight with special light spectrum adapted for the complete food colour palette; optimised for efficient and high-output accent lighting in retail applications (supermarket / food); spotlight with InHouse converter mounted on the TECTON GP adapter, Luminaire with TECTON GP (grand profile) adapter for simple, rapid mounting of luminaire to TECTON continuous-row systems; switchable luminaire; adapter colour white; Colour temperature matched to baked products Ra 90; Luminaire with WIDE FLOOD light distribution 43 °; Chromaticity tolerance (initial MacAdam): 2; Luminaire luminous flux: 2600 lm, Luminaire efficacy: 74 lm/W; service life: 50000 h for luminous flux at 85%; Luminaire input power: 35 W; mains voltage: 220-240 V / 50/60 Hz; Spotlight rotatable through 360° and tiltable through 90°; converter integrated in spotlight housing; spotlight housing made of die-cast aluminium, surface finish: white Micro-textured paint; excellent glare control via front ring made of polycarbonate white; front ring serves to accommodate the accessories (optical, protective glass, honeycomb louvre); specular reflector made of polycarbonate highly reflective aluminized finish, iridescence-free; specular reflector designed to be interchangeable and retrofitted; dimensions: 249x95x208 mm; weight: 1.05 kg; spotlight fixed via TECTON GP adapter (grand profile) to the trunking using CLIX technology
Spotlight cannot be fitted over incoming feeder, central feeder or outgoing feeder




ZS_VI2_F_Strahler_M_TECGP249_whm.jpg

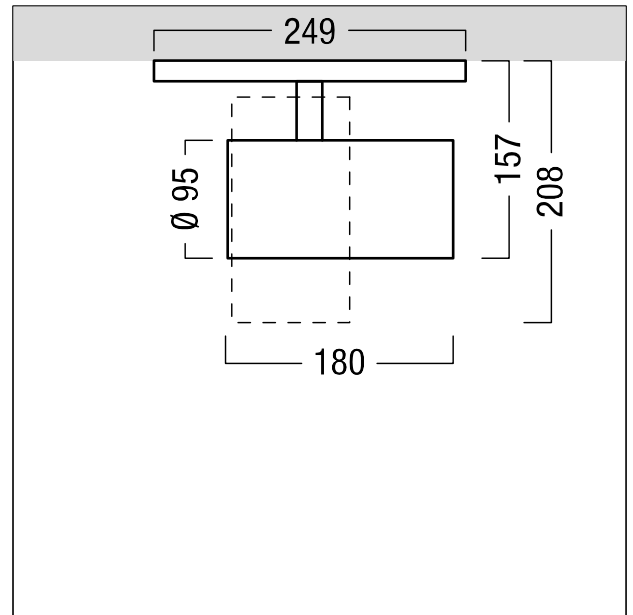

ZS_VI2_M_M_TEC-GP249.wmf

Light Distribution

STD - standard

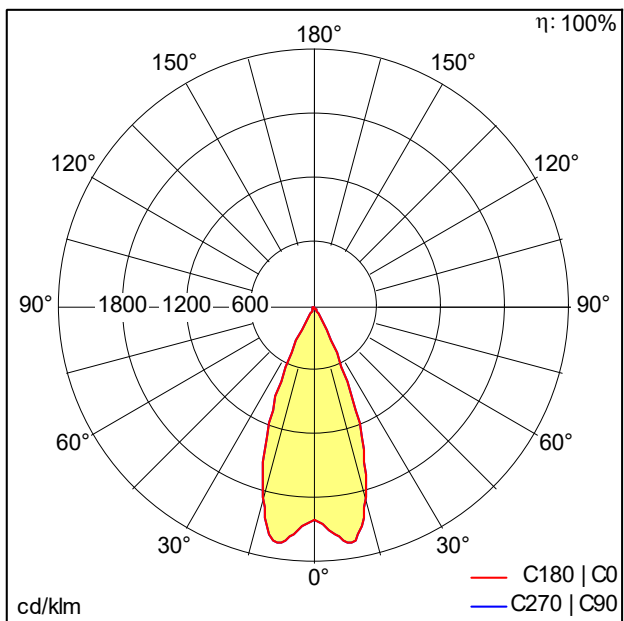

STx658.ltd

- Light Source: LED
- Luminaire luminous flux*: 2600 lm
- Luminaire efficacy*: 74 lm/W
- Colour Rendering Index min.: 97
- Ballast: 1 x 06891163 DRV TC IN 30W 700mA 43V F
- Correlated colour temperature*: 2500 Kelvin
- Chromaticity tolerance (initial MacAdam): 2
- Rated median useful life*:
L85 50000 h at 25 °C
- Luminaire input power*: 35 W Power factor = 0.98
- Dimming: SWI
- Maintenance category CIE 97: C - Closed Top Reflector
- Total harmonic distortion (THD): 10.03 %

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.