

96637998 TONIC XS 1700-930 3GU SP WH




Tonic

LED spotlight for 3 phase track installations with spot light distribution and stabilized color temperature. Electronic, fixed output control gear. Class II electrical, IP20. Body: Die-cast aluminium white micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 360° and pivotable through 90°. Complete with 3000K LED


Dimensions: Ø55 x 125 mm
Luminaire input power: 14.4 W
Luminaire luminous flux: 1492 lm
Luminaire efficacy: 104 lm/W
Weight: 0.4 kg



TLG_TNC2_F_XS_WH.jpg

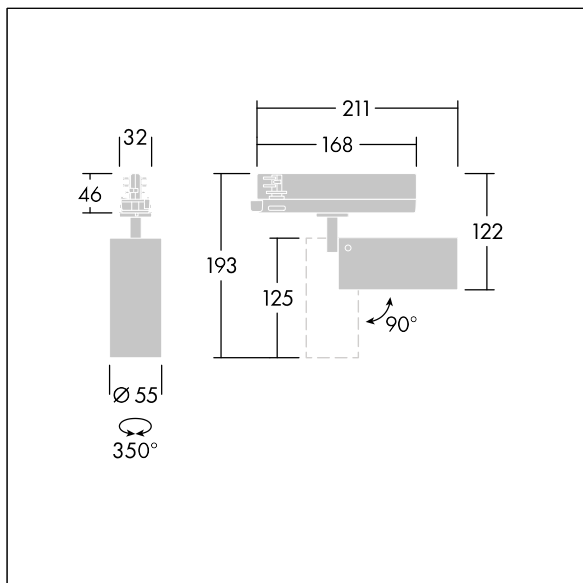

TLG TNC2 M XS.wmf

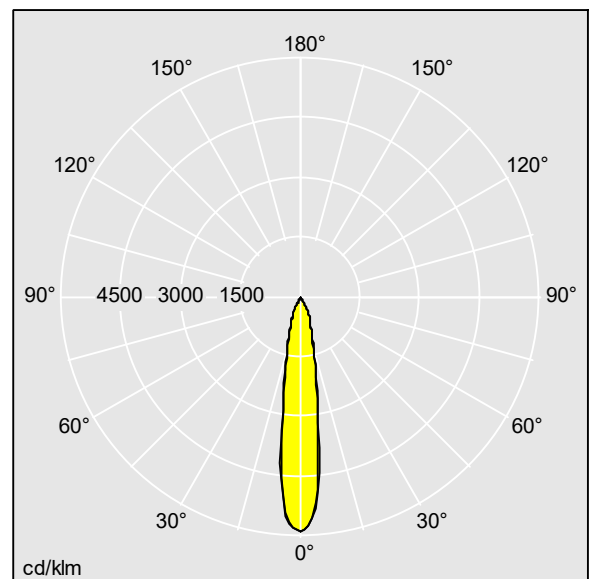

96637998 TONIC XS 1700 930 3GU SP WH.Idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 1492 lm
Luminaire efficacy*: 104 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin
LOR: 1.00 ULOR: 0.00 DLOR: 1.00

Chromaticity tolerance (initial MacAdam): 3
 Rated median useful life*:
 L80 50000 h at 25 °C
 Ballast: 1x HF
 Luminaire input power*: 14.4 W Power factor = 0.9
 Dimming: Fixed output
 Maintenance category CIE 97: D - Enclosed IP2X